


St. Joseph County Council
Additional Appropriation Notification
May 10, 2026

Additional Appropriation - Requested & Approved	\$4,730,000.00
Fund Name	General Fund
Fund Number	1000
Account Number and Name	See attached
Public Hearing Date	May 26, 2026
Public Hearing Time	6:00 PM EST
Public Hearing Location	St. Joseph County Council St. Joseph County Building 4th Floor - County Council Chambers 227 W. Jefferson Boulevard South Bend, IN 46601
County Council & Commissioners Signatures	See ordinance
	
St. Joseph County Auditor	
May 10, 2026	
Date	
jmurphy@sjcindiana.gov	
Email Address	
574-298-0348	
Telephone Number	

Saint Joseph County, Indiana Form D - Appropriation/(Budget Reduction)		Reviews: Department <u> </u> <u>Skyl Medors</u> <u>5/1/2026</u> Signature Date Auditor <u> </u> <u>John Murphy</u> <u>5/4/2026</u> Signature Date Auditor <u> </u> <u>Kathryn Bishop</u> <u>5/4/2026</u> Signature Date Auditor <u> </u> <u> </u> <u>5/1/2026</u> Signature Date Committee Approval (optional) <u> </u> <u>Carl H. Baermeyer</u> <u>5/4/2026</u> Signature Date	
Department Name - Highway Fund Names - General Fund			

Fund.Acct.Obj.Loc	Account Name	Amount	
1000.45010.00000.0064	Vehicles	4,730,000.00	
Total		4,730,000.00	

Salary Amendment

Position Name Current Salary \$0.00 Proposed Salary \$0.00	Position Name Current Salary \$0.00 Proposed Salary \$0.00
Position Name Current Salary \$0.00 Proposed Salary \$0.00	Position Name Current Salary \$0.00 Proposed Salary \$0.00

Justification

Beginning with the 2027 model year, new emissions requirements are expected to increase the cost of heavy-duty truck chassis. Based on information we have received and what is being discussed in the truck industry, we should plan for an increase of approximately \$20,000 to \$30,000 per chassis once those changes take effect. For the 15 trucks we are looking to replace — 5 single-axle trucks and 10 tandem-axle trucks — that could add approximately \$300,000 to \$450,000 to the purchase price if we wait too long. That added cost would not buy us any additional trucks, equipment, or service life. It would simply be the cost of waiting.

Funds will be from the 2025 General Fund Surplus



Price on Page 9

March 30, 2026

Prepared For:

St. Joseph County Highway
 Tod Williams
 227 W Jefferson Blvd.
 South Bend, IN 46601-1830
 (574)235 - 9626

Reference ID: Single Axles

Presented By:

SELKING INTERNATIONAL
 Nic Ellsworth
 2807 GOSHEN ROAD
 FT WAYNE IN 46808 -
 (260)482-3000

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

Model Profile
2027 HV607 SBA (HV607)

AXLE CONFIG:	4X2
APPLICATION:	Front Plow with spreader
MISSION:	Requested GVWR: 39000. Calc. GVWR: 39000. Calc. GCWR: 80000 Calc. Start / Grade Ability: 28.91% / 2.51% @ 55 MPH Calc. Geared Speed: 73.5 MPH
DIMENSION:	Wheelbase: 154.00, CA: 86.90, Axle to Frame: 73.00
ENGINE, DIESEL:	{Cummins L9 300} EPA 2024, 300HP @ 2200 RPM, 860 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed, 300 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 3000 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-16-143A} Wide Track, I-Beam Type, 16,000-lb Capacity
AXLE, REAR, SINGLE:	{Meritor RS-23-160} Single Reduction, 23,000-lb Capacity, Driver Controlled Locking Differential, 200 Wheel Ends Gear Ratio: 5.63
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 315/80R22.5 Load Range L HAU 3 WT (CONTINENTAL), 480 rev/mile, 68 MPH, All-Position
TIRE, REAR:	(4) 11R22.5 Load Range H HDR2+ (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, SINGLE:	31,000-lb Capacity, Vari-Rate Springs, with 4500-lb Capacity Auxiliary Multileaf Springs
PAINT:	Cab schematic 100WL Location 1: 2303, Red (Std) Chassis schematic N/A



Vehicle Specifications
2027 HV607 SBA (HV607)

March 30, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
HV60700	Base Chassis, Model HV607 SBA with 154.00 Wheelbase, 86.90 CA, and 73.00 Axle to Frame.	6136/3544	9680
1ANA	AXLE CONFIGURATION 4x2	0/0	0
	<u>Notes</u> : Pricing may change if axle configuration is changed.		
1CGE	FRAME RAILS Heat Treated Alloy Steel (125,000 PSI Yield); 11.25" x 4.00" x 0.500" (285.75mm x 101.6mm x 12.7mm); 480.8" (1221.2mm) Maximum OAL	173/515	688
1LLA	BUMPER, FRONT Swept Back, Steel, Heavy Duty	0/0	0
1WDS	FRAME EXTENSION, FRONT Integral; 20" In Front of Grille	144/-39	105
1WDU	CROSSMEMBER, FRONT for Hydraulic Pump, Mounting Flange to Accommodate Pump	41/4	45
1WGR	WHEELBASE RANGE 138" (350cm) Through and Including 187" (475cm)	191/-191	0
2ARU	AXLE, FRONT NON-DRIVING {Meritor MFS-16-143A} Wide Track, I-Beam Type, 16,000-lb Capacity	148/0	148
3770	SPRINGS, FRONT AUXILIARY Rubber	10/0	10
3ACP	SUSPENSION, FRONT, SPRING Multileaf, Shackle Type, 16,000-lb Capacity, Less Shock Absorbers	173/0	173
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	0/0	0
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6		
4722	DRAIN VALVE {Bendix DV-2} Automatic, with Heater, for Air Tank	1/0	1
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel {4 Sensor/4 Modulator} Full Vehicle Wheel Control System	0/0	0
4EBD	AIR DRYER {Wabco System Saver 1200} with Heater	7/4	11
4ERC	BRAKE CHAMBERS, POSITION Relocated To Rear Of Rear Axle For Maximum Ground Clearance	0/0	0
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 SqIn Spring Brake	0/7	7
4EXV	BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn	4/0	4
4GBM	BRAKE, PARKING Manual Push-Pull Pneumatic Parking Brake	1/0	1
4LAA	SLACK ADJUSTERS, FRONT {Haldex} Automatic	14/0	14
4LGA	SLACK ADJUSTERS, REAR {Haldex} Automatic	0/16	16
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM	0/0	0



Vehicle Specifications
2027 HV607 SBA (HV607)

March 30, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
4VHZ	AIR TANK LOCATION (2) Mounted Under Cab, Outside Left Rail, on Step Bracket, with Ground Clearance	35/19	54
4VKC	AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab	12/9	21
4WBX	DUST SHIELDS, FRONT BRAKE for Air Cam Brakes	10/0	10
4WDM	DUST SHIELDS, REAR BRAKE for Air Cam Brakes	0/10	10
4XDR	BRAKES, REAR {Meritor 16.5X7 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 7", 23,000-lb Capacity per Axle	0/52	52
4XDT	BRAKES, FRONT {Meritor 16.5X6 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 6", 23,000-lb Capacity	33/0	33
5710	STEERING COLUMN Tilting and Telescoping	17/2	19
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black	0/0	0
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power	104/-8	96
6DGG	DRIVELINE SYSTEM {Dana Spicer} 1710, for 4x2/6x2	7/21	28
7BEV	AFTERTREATMENT COVER Steel, Black	10/3	13
7BLW	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab	128/49	177
7SDP	ENGINE COMPRESSION BRAKE {Jacobs} for Cummins ISL/L9 Engines; with Selector Switch and On/Off Switch	41/7	48
7WAZ	TAIL PIPE (1) Turnback Type	6/4	10
7WDM	EXHAUST HEIGHT 10'	15/13	28
7WDN	MUFFLER/TAIL PIPE GUARD (1) Aluminum	8/8	16
7WZX	SWITCH, FOR EXHAUST 3 Position, Momentary, Lighted Momentary, ON/ CANCEL, Center Stable, INHIBIT REGEN, Mounted in IP Inhibits Diesel Particulate Filter Regeneration When Switch is Moved to ON While Engine is Running, Resets When Ignition is Turned OFF	2/0	2
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment	0/0	0
	<u>Includes</u> : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab : HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light : STARTER SWITCH Electric, Key Operated : STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector : TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature : WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever : WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted : WIRING, CHASSIS Color Coded and Continuously Numbered		
8518	CIGAR LIGHTER Includes Ash Cup	1/0	1
8GXD	ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount, with Remote Sense	0/0	0

INTERNATIONAL

Vehicle Specifications
2027 HV607 SBA (HV607)

March 30, 2026

Code	Description	F/R Wt (lbs)	Tot Wt (lbs)
8HAG	ELECTRIC TRAILER BRAKE/LIGHTS Accommodation Package to Rear of Frame; for Separate Trailer Stop, Tail, Turn, Marker Light Circuits; Includes Electric Trailer Brake accommodation package with Cab Connections for Mounting Customer Installed Electric Brake Unit, Less Trailer Socket	0/2	2
8HAU	BODY BUILDER WIRING INSIDE CAB; Includes Sealed Connectors for Tail/Amber, Turn/Marker/Backup/Accessory, Power/Ground, and Stop/Turn	1/0	1
8MSG	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud	23/30	53
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors	0/0	0
8RPR	ANTENNA for Increased Roof Clearance Applications	1/0	1
8RPS	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/Auxiliary Input	3/0	3
8THB	BACK-UP ALARM Electric, 102 dBA	0/3	3
8THJ	AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications	2/0	2
8TKK	TRAILER AUXILIARY FEED CIRCUIT for Electric Trailer Brake Accommodation/Air Trailer ABS; with 30 Amp Fuse and Relay, Controlled by Ignition Switch	1/0	1
8VAY	HORN, ELECTRIC Disc Style	0/0	0
8VUJ	BATTERY BOX Steel, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Right Side Back of Cab	-37/14	-23
8WBW	JUMP START STUD 12V, Remote Mounted	2/0	2
8WGL	WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time	0/0	0
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade	0/0	0
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights	0/0	0
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn On if Windshield Wipers are Turned On	0/0	0
8WWJ	INDICATOR, LOW COOLANT LEVEL with Audible Alarm	0/0	0
8WXD	ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, with Ignition "OFF" and any Door Opened	0/0	0
8WXG	STARTING MOTOR {Mitsubishi Electric Automotive America 105P} 12-Volt, with Soft-Start	10/0	10
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators. Replaces All Fuses	0/0	0
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender	0/0	0
8XHD	BATTERY DISCONNECT SWITCH 300 Amp, Disconnects Charging Circuits, Locks with Padlock, Cab Mounted	2/0	2
8XNA	CONNECTOR, DASH, CENTER PANEL Cab Wiring for (3) TMC RP1226 Vehicle Accessory Connectors; Includes (3) 14-pin Connectors with Switched Power, Battery Power, Ignition Power, Ground & Body 250K Datalink, Connector Located Behind Instrument Panel Center Console	0/0	0



Vehicle Specifications
2027 HV607 SBA (HV607)

March 30, 2026

Code	Description	F/R Wt (lbs)	Tot Wt (lbs)
8XNY	HEADLIGHTS Halogen	0/0	0
9AAB	LOGOS EXTERIOR Model Badges	0/0	0
9AAE	LOGOS EXTERIOR, ENGINE Badges	0/0	0
9HBM	GRILLE Stationary, Chrome	0/0	0
9HBN	INSULATION, SPLASH PANELS for Sound Abatement	2/0	2
9WBC	FRONT END Tilting, Fiberglass, with Three Piece Construction, for WorkStar/HV	0/0	0
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100	0/0	0
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "WL"		
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
10AGB	CONNECTED PLATFORM Includes Connectivity Module and Five Year Data Plan	1/0	1
10JPA	CUSTOMER IDENTITY for Sourcewell	0/0	0
10SLV	PROMOTIONAL PACKAGE Government Silver Package	0/0	0
10UAV	VEHICLE REGISTRATION IDENTITY ID for Non-CARB Omnibus and/or Non-ACT Adopting State or Exempt Vehicle. Not for use on vehicles registering in CA. Contains non-mitigated legacy engine & cannot be registered in CA unless exempt. You may be held liable under state law for failure to properly register vehicle.	0/0	0
	<u>Notes</u> : CANNOT BE REGISTERED IN CA. For vehicles that will be registered in States other than CA.		
11001	CLUTCH Omit Item (Clutch & Control)	0/0	0
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection	0/0	0
12849	BLOCK HEATER, ENGINE 120V/1000W, for Cummins ISB/B6.7/ISL/L9 Engines	3/0	3
	<u>Includes</u> : BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door		
12851	PTO EFFECTS, ENGINE FRONT Less PTO Unit, Includes Adapter Plate on Engine Front Mounted	10/0	10
12EYW	ENGINE, DIESEL {Cummins L9 300} EPA 2024, 300HP @ 2200 RPM, 860 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed, 300 Peak HP (Max)	554/10	564
12THT	FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed	0/0	0
	<u>Includes</u> : FAN Nylon		
12UWZ	RADIATOR Aluminum, Cross Flow, Front to Back System, 1228 SqIn, with 1167 SqIn Charge Air Cooler, Includes In-Tank Oil Cooler	24/-6	18
	<u>Includes</u> : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber		

INTERNATIONAL

Vehicle Specifications
2027 HV607 SBA (HV607)

March 30, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
12VAG	AIR CLEANER Single Element, with Integral Snow Valve and In-Cab Control	2/0	2
12VKL	EMISSION, CALENDAR YEAR (Cummins L9) EPA, OBD and GHG Certified for Calendar Year 2026	0/0	0
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel	0/0	0
12VYL	ACCESSORY WIRING, SPECIAL for Road Speed Wire Coiled Under Instrument Panel for Customer Use	0/0	0
12WBR	FAN OVERRIDE Manual; with Electric Switch on Instrument Panel, (Fan On with Switch On)	0/0	0
12WVG	EPA IDLE COMPLIANCE Low NOx Idle Engine, Complies with EPA Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood	0/0	0
12WZE	CARB IDLE COMPLIANCE Does Not Comply with California Clean Air Idle Regulations	0/0	0
12XBM	ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls and Starter Lockout, with Ignition Switch Control, for Cummins B6.7 and L9 Engines	0/0	0
12XCS	CARB EMISSION WARR COMPLIANCE Does Not Comply with CARB Emission Warranty	0/0	0
13BCS	TRANSMISSION, AUTOMATIC {Allison 3000 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway	209/74	283
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission	1/0	1
13WGK	TRANSMISSION COOLER HOSES Stainless Steel	0/0	0
13WLP	TRANSMISSION OIL Synthetic; 29 thru 42 Pints	0/0	0
13WUC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS) and Regional Haul Series (RHS), General Purpose Trucks, Construction, Package Number 223	0/0	0
13WVV	NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released	0/0	0
13WYH	TRANSMISSION TCM LOCATION Located Inside Cab	0/0	0
13WYU	SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, Performance Programming	0/0	0
13XAL	PTO LOCATION Customer Intends to Install PTO at Left Side of Transmission	0/0	0
14ARB	AXLE, REAR, SINGLE {Meritor RS-23-160} Single Reduction, 23,000-lb Capacity, Driver Controlled Locking Differential, 200 Wheel Ends . Gear Ratio: 5.63	0/228	228
14SAL	SUSPENSION, REAR, SINGLE 31,000-lb Capacity, Vari-Rate Springs, with 4500-lb Capacity Auxiliary Multileaf Springs	0/207	207
15LNS	FUEL/WATER SEPARATOR {Racor 400 Series} 12 VDC Electric Heater, Includes Pre-Heater, with Primer Pump, Includes Water-in-Fuel Sensor, Mounted on Engine	0/-5	-5
15SPS	FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 19" Tank Depth, 70 US Gal (265L), Mounted Left Side, Back of Cab, 6" Above Frame Rail	7/10	17
15WDG	DEF TANK 7 US Gal (26L) Capacity, Frame Mounted Outside Left Rail, Under Cab	0/0	0

INTERNATIONAL

Vehicle Specifications
2027 HV607 SBA (HV607)

March 30, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
16030	CAB Conventional, Day Cab	0/0	0
16BAM	AIR CONDITIONER with Integral Heater and Defroster	0/0	0
16GEG	GAUGE CLUSTER Premium Level; English with English Electronic Speedometer	0/0	0
	<u>Includes</u> : GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/Refill for : GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure : WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure (Primary and Secondary)		
16GHU	GRAB HANDLE, CAB INTERIOR (2) Safety Yellow	0/0	0
16HGH	GAUGE, OIL TEMP, AUTO TRANS for Allison Transmission	1/0	1
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} Mounted in Instrument Panel	2/0	2
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0
16KDC	SEAT, PASSENGER {National 2000 195} Air-Suspension, High Back with Integral Headrest, Cloth, Isolator, 8" Adjuster, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, 6-23 Degree Back Angle Adjust	54/30	84
16KZX	SEAT, DRIVER {National 2000 195} Air Suspension, High Back with Integral Headrest, Cloth, Isolator, 8" Adjuster, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, 6-23 Degree Back Angle Adjust	0/0	0
16SGH	GRAB HANDLE, EXTERIOR (2) Chrome, for Cab Entry, (1) Towel Bar Type, with Anti-Slip Rubber Inserts Mounted Left Side at B-Pillar, (1) Towel Bar Type Mounted Right Side on Vertical Exhaust	4/2	6
16SJW	MIRROR, CONVEX, HOOD MOUNTED {Lang Mekra} (2) Right and Left Sides, Black, Heated, 7.5" Sq.	9/0	9
16SNP	MIRRORS (2) C-Loop, Power Adjust, Heated, Black Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width	8/0	8
	<u>Notes</u> : Mirror Dimensions are Rounded to the Nearest 0.5"		
16SNW	MIRROR, CONVEX, LOOK DOWN Right Side, Black, 6" x 10.5"	3/0	3
16VCC	SEAT BELT All Orange; 1 to 3	0/0	0
16VKB	CAB INTERIOR TRIM Classic, for Day Cab	0/0	0
	<u>Includes</u> : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger : DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted : SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap		
16VLV	MONITOR, TIRE PRESSURE Omit	-10/-1	-11

INTERNATIONAL

Vehicle Specifications
2027 HV607 SBA (HV607)

March 30, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature	0/0	0
16WLS	FRESH AIR FILTER Attached to Air Intake Cover on Cowl Tray in Front of Windshield Under Hood	0/0	0
16WSK	CAB REAR SUSPENSION Air Bag Type	0/0	0
16XJP	INSTRUMENT PANEL Wing Panel	0/0	0
16XXC	COWL TRAY LID	7/4	11
16ZBT	ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab	0/0	0
27DPN	WHEELS, FRONT {Accuride 29039} DISC; 22.5x9.00 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs, Non-Standard Offset, with .5" Thick Disc	62/0	62
28DUK	WHEELS, REAR {Accuride 29169} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and Steel Hubs	0/24	24
60AAH	BDY INTG, REMOTE POWER MODULE (2) Mounted Inside Cab Behind Driver Seat, Up to 6 Outputs & 6 Inputs Each, Max 20 amp per Channel, Max 80 amp Total; Includes 2 Switch Packs with Latched Switches	0/0	0
60ACT	BDY INTG, SWITCH MOMNTRY 3POS Rocker, Backlit, with "ON" Indicator Mounted on Dash, Latching Software, for 2; Auxiliary Load 20 amp. Maximum; Power Available Only in "Ignition" or "Accessory" Position, Output Also Controlled by a Customer Remote Mounted Switch (requires 2 Remote Power Module inputs & 2 outputs)	0/0	0
7382135444	(4) TIRE, REAR 11R22.5 Load Range H HDR2+ (CONTINENTAL), 491 rev/mile, 75 MPH, Drive	0/20	20
7792545437	(2) TIRE, FRONT 315/80R22.5 Load Range L HAU 3 WT (CONTINENTAL), 480 rev/mile, 68 MPH, All-Position	62/0	62
Services Section:			
40128	WARRANTY Standard for HV507/HV509, HV50B, HV607/HV609 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2025A	0/0	0
Total Component Weight:		8495/4695 (lbs)	13190 (lbs)
Stainless Oil Pan		0/0	0
Total Goods Purchased:		0/0	0

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.

INTERNATIONAL

Financial Summary
2027 HV607 SBA (HV607)

March 30, 2026

<u>Description</u>	(US DOLLAR)	<u>Price</u>
Net Sales Price:		\$107,480.92

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without
Seller's Authorized Signature

Official Title and Date

If you haven't added a planned maintenance service contract to your proposal yet, please get in touch with your local dealer, International or IC Bus Sales Representative to learn more about the benefits when ordering together with the vehicle.

International® Financial offers loans, a full line up of lease options, and can establish a line of credit for use towards the purchase of International and IC Bus vehicles. Ask your dealer, International® or IC Bus® Sales Representative about completing an International Financial credit application and any promotional offers that may be available. International Financial services are provided by Navistar Financial Corporation.

The TOPS FET Calculation is an estimate for reference purposes only. The seller is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described here in are International Motors, LLC* standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.

International Motors, LLC d/b/a International Motors USA LLC in Illinois and Ohio.

Turning Radius Summary
2027 HV607 SBA (HV607)

March 30, 2026

Series: HV
Model: HV607
Description: HV607 SBA
Model Year: 2027

Calculation Factors

Wheelbase: 154
Front Axle: 0002ARU
Description: AXLE, FRONT NON-DRIVING, {Meritor MFS-16-143A} Wide Track, I-Beam Type, 16,000-lb Capacity
Front Wheel: 0027DPN
Description: WHEELS, FRONT, {Accuride 29039} DISC; 22.5x9.00 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs, Non-Standard Offset, with .5" Thick Disc
Front Tire: 07792545437
Description: TIRES, 315/80R22.5 Load Range L HAU 3 WT (CONTINENTAL), 480 rev/mile, 68 MPH, All-Position
Steering Gear: 0005PTB
Description: STEERING GEAR, (2) {Sheppard M100/M80} Dual Power

Turning Radius Statistics

General Information



Inside Turn Angle: 43 Degrees
Radial Overhang: 26

Axle Information

KingPin Inclination: 6.25 Degrees
KingPin Center: 71.5

Turning Radius - Curb View

C - Curb Contact Length: 16.38
CI - Curb Clearance Increment: 6.65
CR - Curb Clearance Radius: 24'9"
CH - Curb Height: 6"
TR - Turning Radius: 24'2"
TW - Tire Width: 12.40

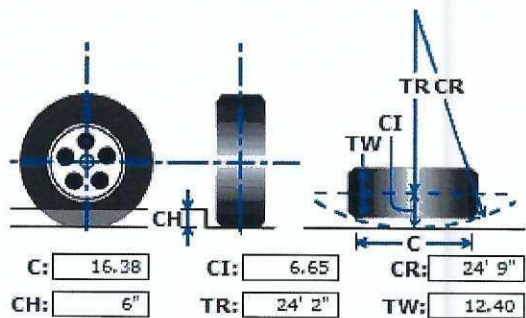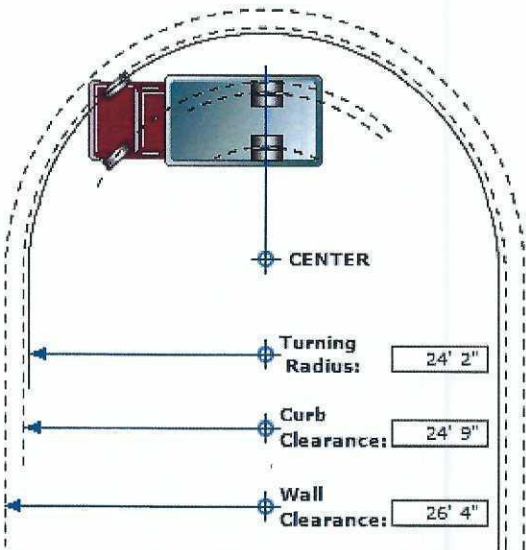

* All Measurements are in inches, unless otherwise specified.

INTERNATIONAL

Turning Radius Summary
2027 HV607 SBA (HV607)

March 30, 2026

This information is based on engineering information available at this time. Actual figures may vary. Navistar, Inc. cannot accept liability for consequences due to this variance.

INTERNATIONAL

Tandem Chassis

March 30, 2026

Prepared For:

St. Joseph County Highway
 Tod Williams
 227 W Jefferson Blvd.
 South Bend, IN 46601-1830
 (574)235 - 9626
 Reference ID: N/A

Price on Page 9

Presented By:

SELKING INTERNATIONAL
 Nic Ellsworth
 2807 GOSHEN ROAD
 FT WAYNE IN 46808 -
 (260)482-3000

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

Model Profile
2027 HV607 SBA (HV607)

AXLE CONFIG:	6X4
APPLICATION:	Front Plow with spreader
MISSION:	Requested GVWR: 56000. Calc. GVWR: 66000. Calc. GCWR: 80000 Calc. Start / Grade Ability: 20.62% / 2.59% @ 55 MPH Calc. Geared Speed: 73.4 MPH
DIMENSION:	Wheelbase: 179.00, CA: 111.90, Axle to Frame: 73.00
ENGINE, DIESEL:	{Cummins L9 370} EPA 2024, 370HP @ 2100 RPM, 1250 lb-ft Torque @ 1200 RPM, 2100 RPM Governed Speed, 370 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 3000 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
AXLE, REAR, TANDEM:	{Meritor RT-46-164P} Single Reduction, Standard Width, 46,000-lb Capacity, with Lube Oil Pump, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends Gear Ratio: 5.38
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 315/80R22.5 Load Range L HAU 3 WT (CONTINENTAL), 480 rev/mile, 68 MPH, All-Position
TIRE, REAR:	(8) 11R22.5 Load Range H HDR2+ (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, TANDEM:	{Hendrickson HMX EX 460} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with Transverse Torque Rods, Rubber End Bushings
PAINT:	Cab schematic 100WL Location 1: 2303, Red (Std) Chassis schematic N/A

INTERNATIONAL

Vehicle Specifications
2027 HV607 SBA (HV607)

March 30, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
HV60700	Base Chassis, Model HV607 SBA with 179.00 Wheelbase, 111.90 CA, and 73.00 Axle to Frame.	6136/3544	9680
1AND	AXLE CONFIGURATION 6x4	0/0	0
	<u>Notes</u> : Pricing may change if axle configuration is changed.		
1CGE	FRAME RAILS Heat Treated Alloy Steel (125,000 PSI Yield); 11.25" x 4.00" x 0.500" (285.75mm x 101.6mm x 12.7mm); 480.8" (1221.2mm) Maximum OAL	255/582	837
1LLA	BUMPER, FRONT Swept Back, Steel, Heavy Duty	0/0	0
1WDS	FRAME EXTENSION, FRONT Integral; 20" In Front of Grille	138/-33	105
1WDU	CROSSMEMBER, FRONT for Hydraulic Pump, Mounting Flange to Accommodate Pump	42/3	45
1WGX	WHEELBASE RANGE 169" (430cm) Through and Including 219" (555cm)	418/-418	0
2ARY	AXLE, FRONT NON-DRIVING {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity	186/0	186
3770	SPRINGS, FRONT AUXILIARY Rubber	10/0	10
3AHU	SUSPENSION, FRONT, SPRING Multi-Stage Parabolic Taper Leaf, Shackle Type, 20,000-lb Capacity, with Shock Absorbers	159/0	159
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	0/0	0
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6		
4722	DRAIN VALVE {Bendix DV-2} Automatic, with Heater, for Air Tank	1/0	1
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System	0/0	0
4EBD	AIR DRYER {Wabco System Saver 1200} with Heater	8/3	11
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 SqIn Spring Brake	0/14	14
4EXV	BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn	4/0	4
4GBM	BRAKE, PARKING Manual Push-Pull Pneumatic Parking Brake	1/0	1
4LAA	SLACK ADJUSTERS, FRONT {Haldex} Automatic	14/0	14
4LGA	SLACK ADJUSTERS, REAR {Haldex} Automatic	0/32	32
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM	0/0	0
4VHZ	AIR TANK LOCATION (2) Mounted Under Cab, Outside Left Rail, on Step Bracket, with Ground Clearance	38/16	54
4VKC	AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab	14/7	21

INTERNATIONAL

Vehicle Specifications
2027 HV607 SBA (HV607)

March 30, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
4WBX	DUST SHIELDS, FRONT BRAKE for Air Cam Brakes	10/0	10
4WDM	DUST SHIELDS, REAR BRAKE for Air Cam Brakes	0/20	20
4WDW	BRAKE CHAMBERS, POSITION on Rear/Rear Axle Located Inside Rear Tire Envelope (Meets Asphalt Spreader/Paver Clearance Requirements)	0/0	0
4XDR	BRAKES, REAR {Meritor 16.5X7 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 7", 23,000-lb Capacity per Axle	0/104	104
4XDT	BRAKES, FRONT {Meritor 16.5X6 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 6", 23,000-lb Capacity	33/0	33
4XEE	PARK BRAKE CHAMBERS, ADDITIONAL (2) Spring Brake Type	0/60	60
5710	STEERING COLUMN Tilting and Telescoping	17/2	19
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black	0/0	0
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power	103/-7	96
6DGT	DRIVELINE SYSTEM {Dana Spicer} SPL170 Main Driveline with SPL170 Interaxle Shaft, for 6x4	7/31	38
7BEV	AFTERTREATMENT COVER Steel, Black	10/3	13
7BLW	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab	135/42	177
7SDP	ENGINE COMPRESSION BRAKE {Jacobs} for Cummins ISL/L9 Engines; with Selector Switch and On/Off Switch	42/6	48
7WAZ	TAIL PIPE (1) Turnback Type	7/3	10
7WDM	EXHAUST HEIGHT 10'	17/11	28
7WDN	MUFFLER/TAIL PIPE GUARD (1) Aluminum	9/7	16
7WZX	SWITCH, FOR EXHAUST 3 Position, Momentary, Lighted Momentary, ON/CANCEL, Center Stable, INHIBIT REGEN, Mounted in IP Inhibits Diesel Particulate Filter Regeneration When Switch is Moved to ON While Engine is Running, Resets When Ignition is Turned OFF	2/0	2
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment	0/0	0
	Includes		
	: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab		
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel		
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever		
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light		
	: STARTER SWITCH Electric, Key Operated		
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector		
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature		
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever		
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted		
	: WIRING, CHASSIS Color Coded and Continuously Numbered		
8518	CIGAR LIGHTER Includes Ash Cup	1/0	1
8GXD	ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount, with Remote Sense	0/0	0

INTERNATIONAL

Vehicle Specifications
2027 HV607 SBA (HV607)

March 30, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
8HAG	ELECTRIC TRAILER BRAKE/LIGHTS Accommodation Package to Rear of Frame; for Separate Trailer Stop, Tail, Turn, Marker Light Circuits; Includes Electric Trailer Brake accommodation package with Cab Connections for Mounting Customer Installed Electric Brake Unit, Less Trailer Socket	0/2	2
8HAU	BODY BUILDER WIRING INSIDE CAB; Includes Sealed Connectors for Tail/Amber, Turn/Marker/Backup/Accessory, Power/Ground, and Stop/Turn	1/0	1
8MSG	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud	27/26	53
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors	0/0	0
8RPR	ANTENNA for Increased Roof Clearance Applications	1/0	1
8RPS	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/Auxiliary Input	3/0	3
8THB	BACK-UP ALARM Electric, 102 dBA	0/3	3
8THJ	AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications	2/0	2
8TKK	TRAILER AUXILIARY FEED CIRCUIT for Electric Trailer Brake Accommodation/Air Trailer ABS; with 30 Amp Fuse and Relay, Controlled by Ignition Switch	1/0	1
8VAY	HORN, ELECTRIC Disc Style	0/0	0
8VUJ	BATTERY BOX Steel, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Right Side Back of Cab	-35/12	-23
8WBW	JUMP START STUD 12V, Remote Mounted	2/0	2
8WGL	WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time	0/0	0
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade	0/0	0
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights	0/0	0
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn On if Windshield Wipers are Turned On	0/0	0
8WWJ	INDICATOR, LOW COOLANT LEVEL with Audible Alarm	0/0	0
8WXD	ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, with Ignition "OFF" and any Door Opened	0/0	0
8WXG	STARTING MOTOR {Mitsubishi Electric Automotive America 105P} 12-Volt, with Soft-Start	10/0	10
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses	0/0	0
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender	0/0	0
8XHD	BATTERY DISCONNECT SWITCH 300 Amp, Disconnects Charging Circuits, Locks with Padlock, Cab Mounted	2/0	2
8XNA	CONNECTOR, DASH, CENTER PANEL Cab Wiring for (3) TMC RP1226 Vehicle Accessory Connectors; Includes (3) 14-pin Connectors with Switched Power, Battery Power, Ignition Power, Ground & Body 250K Datalink, Connector Located Behind Instrument Panel Center Console	0/0	0

INTERNATIONAL

Vehicle Specifications
2027 HV607 SBA (HV607)

March 30, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
8XNY	HEADLIGHTS Halogen	0/0	0
9AAB	LOGOS EXTERIOR Model Badges	0/0	0
9AAE	LOGOS EXTERIOR, ENGINE Badges	0/0	0
9HBM	GRILLE Stationary, Chrome	0/0	0
9HBN	INSULATION, SPLASH PANELS for Sound Abatement	2/0	2
9WBC	FRONT END Tilting, Fiberglass, with Three Piece Construction, for WorkStar/HV	0/0	0
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100	0/0	0
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "WL"		
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
10AGB	CONNECTED PLATFORM Includes Connectivity Module and Five Year Data Plan	1/0	1
10JPA	CUSTOMER IDENTITY for Sourcewell	0/0	0
10SLV	PROMOTIONAL PACKAGE Government Silver Package	0/0	0
10UAV	VEHICLE REGISTRATION IDENTITY ID for Non-CARB Omnibus and/or Non-ACT Adopting State or Exempt Vehicle. Not for use on vehicles registering in CA. Contains non-mitigated legacy engine & cannot be registered in CA unless exempt. You may be held liable under state law for failure to properly register vehicle.	0/0	0
	<u>Notes</u> : CANNOT BE REGISTERED IN CA. For vehicles that will be registered in States other than CA.		
11001	CLUTCH Omit Item (Clutch & Control)	0/0	0
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection	0/0	0
12849	BLOCK HEATER, ENGINE 120V/1000W, for Cummins ISB/B6.7/ISL/L9 Engines	3/0	3
	<u>Includes</u> : BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door		
12851	PTO EFFECTS, ENGINE FRONT Less PTO Unit, Includes Adapter Plate on Engine Front Mounted	10/0	10
12EZA	ENGINE, DIESEL {Cummins L9 370} EPA 2024, 370HP @ 2100 RPM, 1250 lb-ft Torque @ 1200 RPM, 2100 RPM Governed Speed, 370 Peak HP (Max)	555/9	564
12THT	FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed	0/0	0
	<u>Includes</u> : FAN Nylon		
12UWZ	RADIATOR Aluminum, Cross Flow, Front to Back System, 1228 SqIn, with 1167 SqIn Charge Air Cooler, Includes In-Tank Oil Cooler	23/-5	18
	<u>Includes</u> : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber		

INTERNATIONAL

Vehicle Specifications
2027 HV607 SBA (HV607)

March 30, 2026

Code	Description	F/R Wt (lbs)	Tot Wt (lbs)
12VAG	AIR CLEANER Single Element, with Integral Snow Valve and In-Cab Control	2/0	2
12VKL	EMISSION, CALENDAR YEAR {Cummins L9} EPA, OBD and GHG Certified for Calendar Year 2026	0/0	0
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel	0/0	0
12VYL	ACCESSORY WIRING, SPECIAL for Road Speed Wire Coiled Under Instrument Panel for Customer Use	0/0	0
12WBR	FAN OVERRIDE Manual; with Electric Switch on Instrument Panel, (Fan On with Switch On)	0/0	0
12WVG	EPA IDLE COMPLIANCE Low NOx Idle Engine, Complies with EPA Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood	0/0	0
12WZE	CARB IDLE COMPLIANCE Does Not Comply with California Clean Air Idle Regulations	0/0	0
12XBM	ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls and Starter Lockout, with Ignition Switch Control, for Cummins B6.7 and L9 Engines	0/0	0
12XCS	CARB EMISSION WARR COMPLIANCE Does Not Comply with CARB Emission Warranty	0/0	0
13BCS	TRANSMISSION, AUTOMATIC {Allison 3000 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway	219/64	283
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission	1/0	1
13WGK	TRANSMISSION COOLER HOSES Stainless Steel	0/0	0
13WLP	TRANSMISSION OIL Synthetic; 29 thru 42 Pints	0/0	0
13WUC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS) and Regional Haul Series (RHS), General Purpose Trucks, Construction, Package Number 223	0/0	0
13WVV	NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released	0/0	0
13WYH	TRANSMISSION TCM LOCATION Located Inside Cab	0/0	0
13WYU	SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, Performance Programming	0/0	0
13XAL	PTO LOCATION Customer Intends to Install PTO at Left Side of Transmission	0/0	0
14HRE	AXLE, REAR, TANDEM {Meritor RT-46-164P} Single Reduction, Standard Width, 46,000-lb Capacity, with Lube Oil Pump, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends . Gear Ratio: 5.38	0/2625	2625
14UMX	SUSPENSION, REAR, TANDEM {Hendrickson HMX EX 460} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with Transverse Torque Rods, Rubber End Bushings	0/885	885
14WCR	TRANSVERSE TORQUE RODS {Hendrickson} TRAAX Rod, Transverse Only	0/-4	-4
15LNS	FUEL/WATER SEPARATOR {Racor 400 Series} 12 VDC Electric Heater, Includes Pre-Heater, with Primer Pump, Includes Water-in-Fuel Sensor, Mounted on Engine	-1/-4	-5

INTERNATIONAL

Vehicle Specifications
2027 HV607 SBA (HV607)

March 30, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
15SPS	FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 19" Tank Depth, 70 US Gal (265L), Mounted Left Side, Back of Cab, 6" Above Frame Rail	9/8	17
15WDG	DEF TANK 7 US Gal (26L) Capacity, Frame Mounted Outside Left Rail, Under Cab	0/0	0
16030	CAB Conventional, Day Cab	0/0	0
16BAM	AIR CONDITIONER with Integral Heater and Defroster	0/0	0
16GEG	GAUGE CLUSTER Premium Level; English with English Electronic Speedometer	0/0	0
	<u>Includes</u> : GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/ Refill for : GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure : WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure (Primary and Secondary)		
16GHU	GRAB HANDLE, CAB INTERIOR (2) Safety Yellow	0/0	0
16HGH	GAUGE, OIL TEMP, AUTO TRANS for Allison Transmission	1/0	1
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} Mounted in Instrument Panel	2/0	2
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0
16KDC	SEAT, PASSENGER {National 2000 195} Air-Suspension, High Back with Integral Headrest, Cloth, Isolator, 8" Adjuster, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, 6-23 Degree Back Angle Adjust	59/25	84
16KZX	SEAT, DRIVER {National 2000 195} Air Suspension, High Back with Integral Headrest, Cloth, Isolator, 8" Adjuster, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, 6-23 Degree Back Angle Adjust	0/0	0
16SGH	GRAB HANDLE, EXTERIOR (2) Chrome, for Cab Entry, (1) Towel Bar Type, with Anti-Slip Rubber Inserts Mounted Left Side at B-Pillar, (1) Towel Bar Type Mounted Right Side on Vertical Exhaust	4/2	6
16SJW	MIRROR, CONVEX, HOOD MOUNTED {Lang Mekra} (2) Right and Left Sides, Black, Heated, 7.5" Sq.	9/0	9
16SNP	MIRRORS (2) C-Loop, Power Adjust, Heated, Black Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width	8/0	8
	<u>Notes</u> : Mirror Dimensions are Rounded to the Nearest 0.5"		
16SNW	MIRROR, CONVEX, LOOK DOWN Right Side, Black, 6" x 10.5"	3/0	3
16VCC	SEAT BELT All Orange; 1 to 3	0/0	0
16VKB	CAB INTERIOR TRIM Classic, for Day Cab	0/0	0
	<u>Includes</u> : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger : DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted		

INTERNATIONAL

Vehicle Specifications
2027 HV607 SBA (HV607)

March 30, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap		
16VLV	MONITOR, TIRE PRESSURE Omit	-10/-1	-11
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature	0/0	0
16WLS	FRESH AIR FILTER Attached to Air Intake Cover on Cowl Tray in Front of Windshield Under Hood	0/0	0
16WSK	CAB REAR SUSPENSION Air Bag Type	0/0	0
16XJP	INSTRUMENT PANEL Wing Panel	0/0	0
16XXC	COWL TRAY LID	8/3	11
16ZBT	ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab	0/0	0
27DPN	WHEELS, FRONT {Accuride 29039} DISC; 22.5x9.00 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs, Non-Standard Offset, with .5" Thick Disc	62/0	62
28DUK	WHEELS, REAR {Accuride 29169} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and Steel Hubs	0/48	48
60AAH	BDY INTG, REMOTE POWER MODULE (2) Mounted Inside Cab Behind Driver Seat, Up to 6 Outputs & 6 Inputs Each, Max 20 amp per Channel, Max 80 amp Total; Includes 2 Switch Packs with Latched Switches	0/0	0
60ACT	BDY INTG, SWITCH MOMNTRY 3POS Rocker, Backlit, with "ON" Indicator Mounted on Dash, Latching Software, for 2; Auxiliary Load 20 amp. Maximum; Power Available Only in "Ignition" or "Accessory" Position, Output Also Controlled by a Customer Remote Mounted Switch (requires 2 Remote Power Module inputs & 2 outputs)	0/0	0
7382135444	(8) TIRE, REAR 11R22.5 Load Range H HDR2+ (CONTINENTAL), 491 rev/mile, 75 MPH, Drive	0/40	40
7792545437	(2) TIRE, FRONT 315/80R22.5 Load Range L HAU 3 WT (CONTINENTAL), 480 rev/mile, 68 MPH, All-Position	62/0	62
Services Section:			
40128	WARRANTY Standard for HV507/HV509, HV50B, HV607/HV609 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2025A	0/0	0
Total Component Weight:		8863/7770 (lbs)	16633 (lbs)
Stainless Oil Pan		0/0	0
Total Goods Purchased:		0/0	0

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.

INTERNATIONAL

Financial Summary
2027 HV607 SBA (HV607)

March 30, 2026

<u>Description</u>	(US DOLLAR)	<u>Price</u>
Net Sales Price:		\$127,375.83

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without
Seller's Authorized Signature

Official Title and Date

If you haven't added a planned maintenance service contract to your proposal yet, please get in touch with your local dealer, International or IC Bus Sales Representative to learn more about the benefits when ordering together with the vehicle.

International® Financial offers loans, a full line up of lease options, and can establish a line of credit for use towards the purchase of International and IC Bus vehicles. Ask your dealer, International® or IC Bus® Sales Representative about completing an International Financial credit application and any promotional offers that may be available. International Financial services are provided by Navistar Financial Corporation.

The TOPS FET Calculation is an estimate for reference purposes only. The seller is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described here in are International Motors, LLC* standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.

International Motors, LLC d/b/a International Motors USA LLC in Illinois and Ohio.

Turning Radius Summary
2027 HV607 SBA (HV607)

March 30, 2026

Series: HV
Model: HV607
Description: HV607 SBA
Model Year: 2027

Calculation Factors

Wheelbase: 179
Front Axle: 0002ARY
Description: AXLE, FRONT NON-DRIVING, {Meritor MFS-20-133A}
Wide Track, I-Beam Type, 20,000-lb Capacity
Front Wheel: 0027DPN
Description: WHEELS, FRONT, {Accuride 29039} DISC; 22.5x9.00 Rims,
Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC,
Hub-Piloted, Flanged Nut, with Steel Hubs, Non-Standard
Offset, with .5" Thick Disc
Front Tire: 07792545437
Description: TIRES, 315/80R22.5 Load Range L HAU 3 WT
(CONTINENTAL), 480 rev/mile, 68 MPH, All-Position
Steering Gear: 0005PTB
Description: STEERING GEAR, (2) {Sheppard M100/M80} Dual Power

Turning Radius Statistics

General Information



Inside Turn Angle: 40 Degrees
Radial Overhang: 26

Axle Information

KingPin Inclination: 6.25 Degrees
KingPin Center: 71

Turning Radius - Curb View

C - Curb Contact Length: 16.38
CI - Curb Clearance Increment: 6.58
CR - Curb Clearance Radius: 29'6"
CH - Curb Height: 6"
TR - Turning Radius: 28'11"
TW - Tire Width: 12.40

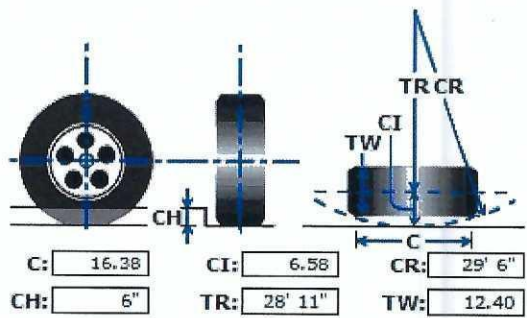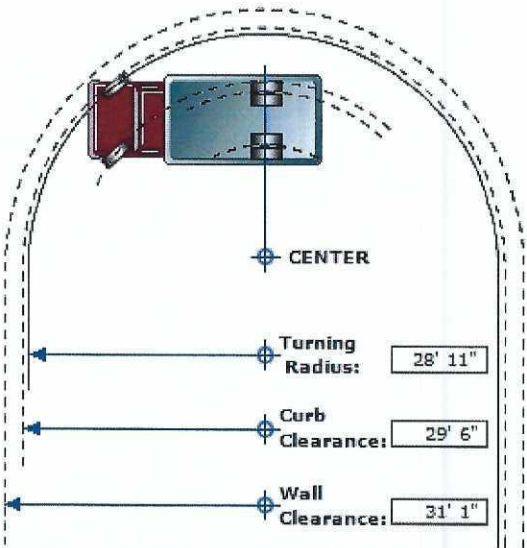

* All Measurements are in inches, unless otherwise specified.

◀ ◆ INTERNATIONAL

Turning Radius Summary
2027 HV607 SBA (HV607)

March 30, 2026

This information is based on engineering information available at this time. Actual figures may vary. Navistar, Inc. cannot accept liability for consequences due to this variance.

W.A. Jones

Truck Bodies and Equipment



Columbia City, IN

www.wajonestruckequipment.com

Quotation For:

St Joseph County Highway
Todd Williams

Phone: 574-339-6101

Quote

MS2627

Email: twilliams@sjcindiana.gov

Date:

3/17/2026

67266 IN-23

Delivery: 2027

Sales

Mike Straessle

North Liberty, IN 46554

Rep:

Description

Qty

Sale Price

SOURCEWELL CONTRACT 062222-AEB

Equipment to be provided and installed by W.A. Jones Truck Equipment:

BODY:

MONROE RDS Dual Auger 201 Stainless Steel

1

\$171,464.06

10' Long x 96" Wide x 44" Sides, Air Tailgate

Motor Kit: Dual 24.9 Cubic Inch Motors, 100 Pulse Speed Sensor

Drive Kit: Dual 3.6:1 Planetary Gearboxes, Poly Auger Bushings, .375" Bearing Plate, 2" HD 4 Bolt Greasable Bearings

Extended Body Mount Fenders 70.1" Long x 31" Wide

24" Cabshield with Recessed Lighting, Rectangular Double Acting Boxed Perimeter Tailgate

Double Acting Telescopic Hoist, Ladder Kit, Side Boards and Bed Vibrator

(2) Stainless Steel Shovel Holders and Rear Mud Flaps and Anti-Sail Brackets

Chicago Style Spinner Assy, 201 Stainless Steel Outer Box with Poly Spinner

Front Plow:

MONROE MP41R11 Reversible, 11' Long 41" Tall

34" Hustings Hitch

Plow Markers, Trip Kit, Jack Kit and Deflector

Underbody:

MONROE MP4511 Scraper with 1" Thick 20" Moldboard

Reversible, 5" Center Pin, Remote Grease Line Kit

Hydraulics:

Certified Power XDS System, PTO, Pump, Valve/Tank Combo, Stainless Lines and Quick Couplers, 7" Touchscreen

Single Stick Console with Operator Modules to Control Front Plow, Scraper and Hoist, Load Sense Plow Balance

Lighting:

Strobes: (6) Forward Facing and (6) Rearward Facing Recessed 6" LED Amber Strobes In The Cabshield, (2) Side Facing

on the Cabshield, (1) On Each Rear Post, (2) Stop/Turn/Tail/Reverse Lights in each Rear Post, Hood Mounted Plow

Lights on Stainless Steel Brackets, (2) Underbody LED Work lights and (1) Rear Led Spreader Light

Camera System:

MS Foster Dual Camera System with 7" In Cab Monitor, Camera Wash and (2) Stainless Steel Camera Boxes

(1) Mounted On Cabshield and (1) Mounted Rear Body Pillar

Rear Hitch:

3/4" Hitchplate with 1/2" D-Rings, 7 Way Wiring, Pintle Hitch, Dual Receivers for Chicago Style Spinner Assembly

Chipper Bar Built and Mounted to Customer Spec.

DOT Reflective Tape On Sides and Rear of the Body

Front Tow Hooks

Notes:

Sub Total \$ 171,464.06

Sales Tax

Total \$ 171,464.06

1171 South Williams Dr.
Columbia City, IN 46725
Phone: 260-244-7661

www.wajonestruckequipment.com

W.A. Jones

Truck Bodies and Equipment



Columbia City, IN

www.wajonestruckequipment.com

Quotation For:

St Joseph County Highway
Todd Williams

Phone: 574-339-6101

Quote

MS2627

Email: twilliams@sjcindiana.gov

Date:

3/17/2026

67266 IN-23

Delivery: 2027

Sales

Mike Straessle

North Liberty, IN 46554

Rep:

Description

Qty

Sale Price

SOURCEWELL CONTRACT 062222-AEB

Equipment to be provided and installed by W.A. Jones Truck Equipment:

BODY:

MONROE RDS Dual Auger 201 Stainless Steel

1

\$192,284.18

14' Long x 96" Wide x 44" Sides, Air Tailgate

Motor Kit: Dual 24.9 Cubic Inch Motors, 100 Pulse Speed Sensor

Drive Kit: Dual 3.6:1 Planetary Gearboxes, Poly Auger Bushings, .375" Bearing Plate, 2" HD 4 Bolt Greasable Bearings

Extended Body Mount Fenders 70.1" Long x 31" Wide

24" Cabshield with Recessed Lighting, Rectangular Double Acting Boxed Perimeter Tailgate

Double Acting Mailhot Hoist, Ladder Kit, Side Boards and Bed Vibrator

(2) Stainless Steel Shovel Holders and Rear Mud Flaps and Anti-Sail Brackets

Chicago Style Spinner Assy, 201 Stainless Steel Outer Box with Poly Spinner

Front Plow:

Root 551X One Way Plow, 35" Intake 71" Discharge, 38 Degree Cut Angle, 167" Length, Orange/Black

34" Hustings Hitch

Plow Markers, Fixed Angle/No Trip, Adjustable Plow Shoes, Roll Top Steel Deflector, Right Discharge

Underbody:

MONROE MP4511 Scraper with 1" Thick 20" Tall Moldboard

Reversible, 5" Center Pin, Remote Grease Line Kit

Hydraulics:

Certified Power XDS System, PTO, Pump, Valve/Tank Combo, Element Filter, Stainless Lines and Quick Couplers,

Single Stick Console with Operator Modules to Control Front Plow, Scraper & Hoist, 7" TouchScreen Spreader Control

Lighting:

Strobes: (6) Forward Facing and (6) Rearward Facing Recessed 6" LED Amber Strobes In The Cabshield, (2) Side Facing

on the Cabshield, (1) On Each Rear Post, (2) Stop/Turn/Tail/Reverse Lights in each Rear Post, Hood Mounted Plow

Lights on Stainless Steel Brackets, (2) Underbody LED Work lights and (1) Rear Led Spreader Light

Camera System:

MS Foster Dual Camera System with 7" In Cab Monitor, Camera Wash and (2) Stainless Steel Camera Boxes

(1) Mounted On Cabshield and (1) Mounted Rear Body Pillar

Rear Hitch:

3/4" Hitchplate with 1/2" D-rings, 7 Way Wiring, Pintle Hitch, Dual Receivers for Chicago Style Spinner Assembly

Chipper Bar Built and Mounted to Customer Spec.

DOT Reflective Tape On Sides and Rear of the Body

Front Tow Hooks

Notes:

Sub Total \$ 192,284.18

Sales Tax

Total \$ 192,284.18

1171 South Williams Dr.
Columbia City, IN 46725
Phone: 260-244-7661

www.wajonestruckequipment.com